




www.durable-tires.com

A large, detailed, grayscale illustration of a tractor tire tread pattern, showing deep grooves and sipes, serves as the background for the lower half of the page.

CATALOGO DE PNEUS AGRÍCOLAS

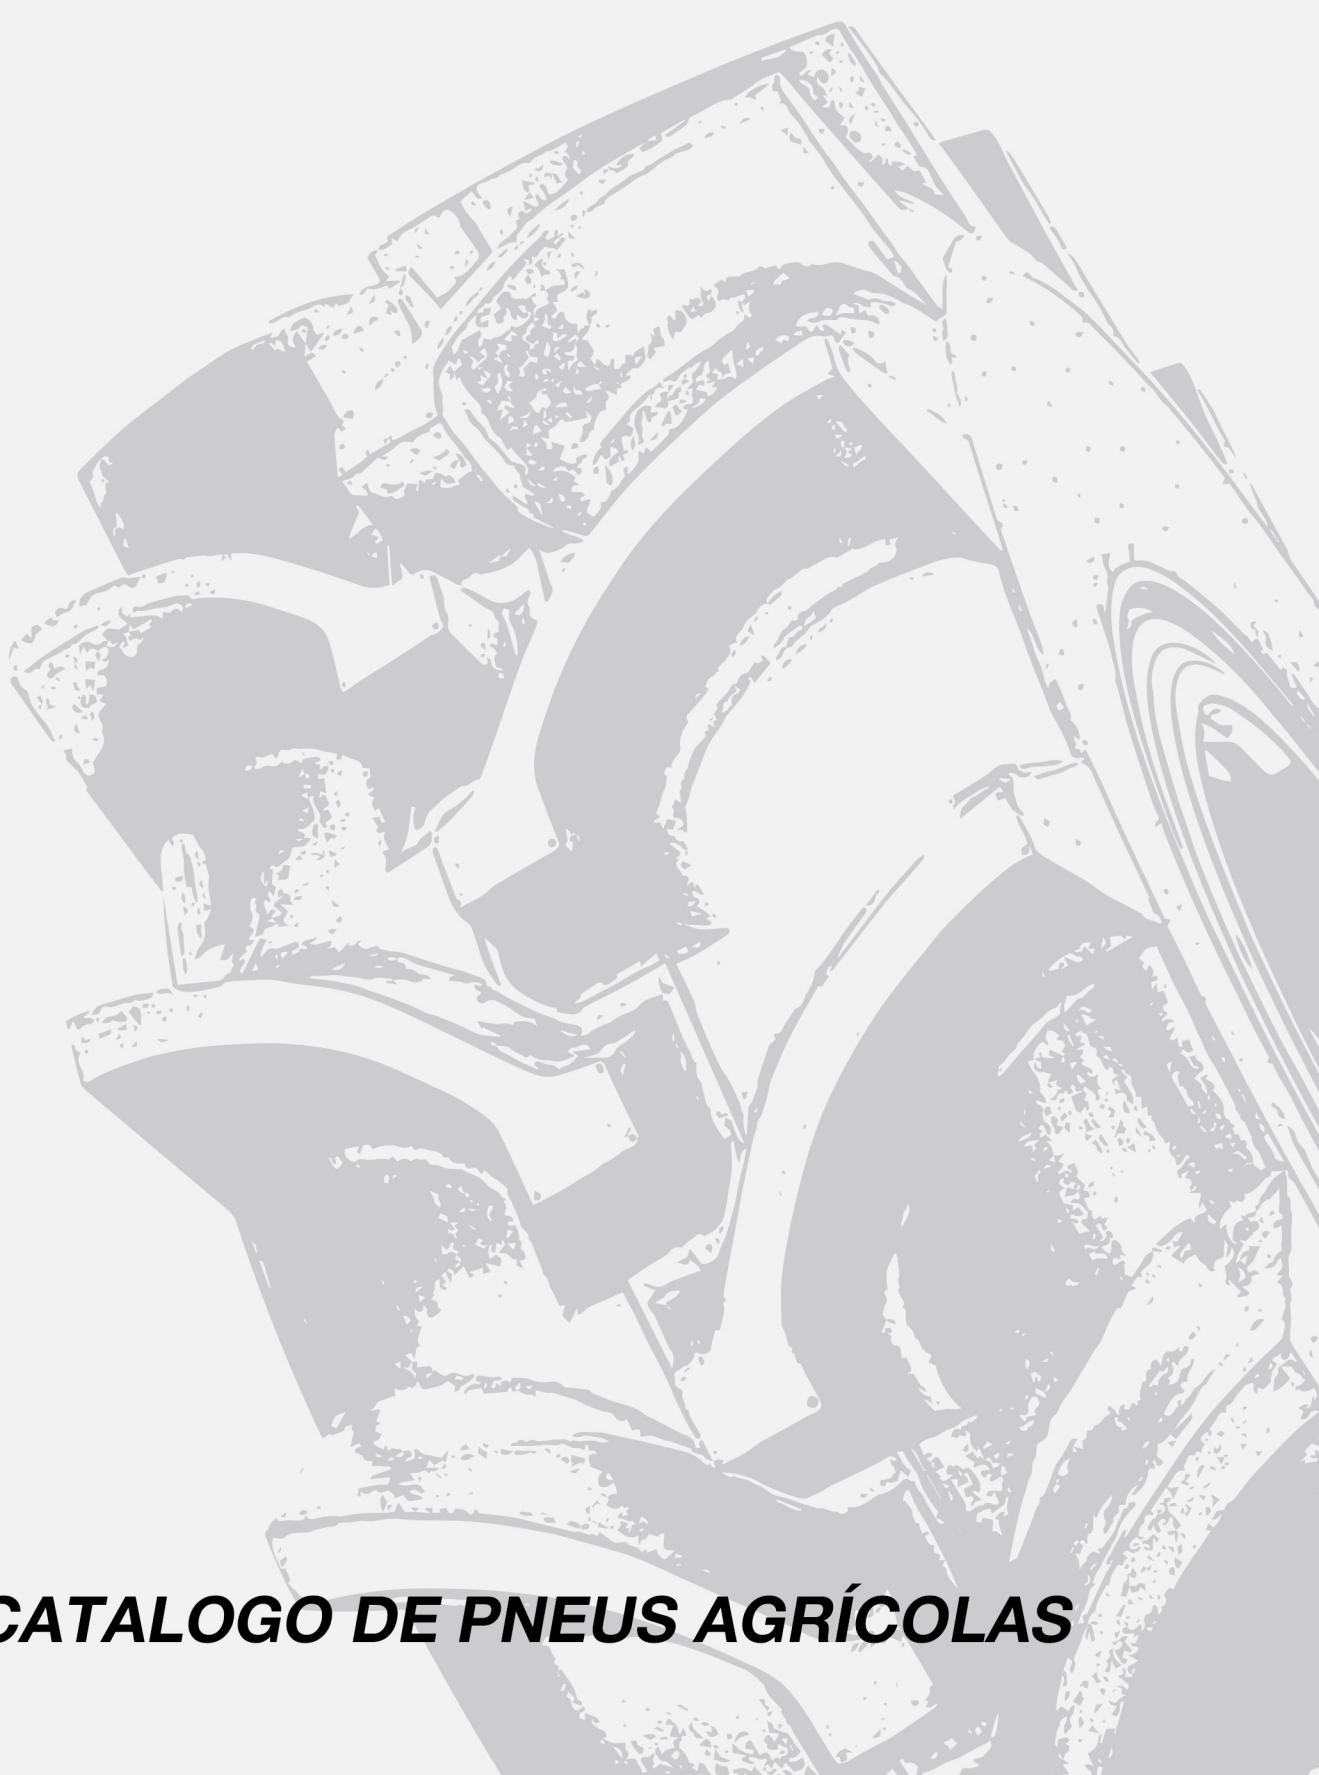

DR611

TAMANHO	PLY	DIAMETRO EXTERNO	LARGURA DE SEÇÃO	ARO STANDARD	PRESSÃO MAX (KPA)	CARGA MAX. KG
12.4-24TT	8PR	1,159	315	W11	220	1,285
12.4-24TT	12PR	1,159	315	W11	330	1,600
12.4-38TT	8PR	1,514	315	W11	220	1,600
12.4-38TT	12PR	1,514	315	W11	320	1,850
13.6-24TT	8PR	1,210	345	W12	190	1,400
13.6-24TT	12PR	1,210	345	W12	260	1,600
13.6-28TT	8PR	1,311	345	W12	210	1,645
13.6-28TT	12PR	1,311	345	W12	250	1,900
13.6-38TT	8PR	1,565	345	W12	210	1,750
13.6-38TT	12PR	1,565	345	W12	260	2,000
14.9-24TT	8PR	1,265	378	W13	180	1,600
14.9-24TT	12PR	1,265	378	W13	260	2,000
14.9-24TL	8PR	1,265	378	W13	180	1,600
14.9-26TT	8PR	1,316	378	W13	190	1,950
14.9-26TT	12PR	1,316	378	W13	260	2,060
15.5-38TT	10PR	1569	394	W14L	220	2000
15.5-38TT	12PR	1569	394	W14L	260	2120
16.9-24TT	10PR	1333	429	W15L	170	1850
16.9-24TT	12PR	1333	429	W15L	230	2120
16.9-28TT	10PR	1435	429	W15L	190	2120



DR611

TAMANHO	PLY	DIAMETRO EXTERNO	LARGURA DE SEÇÃO	ARO STANDARD	PRESSÃO MAX (KPA)	CARGA MAX. KG
16.9-28TT	12PR	1435	429	W15L	230	2360
16.9-30TT	10PR	1485	429	W15L	190	2240
16.9-30TT	12PR	1485	429	W15L	230	2500
16.9-34TT	10PR	1587	429	W15L	190	2360
16.9-34TT	12PR	1587	429	W15L	230	2575
18.4-26TT	12PR	1450	467	DW16	220	2650
18.4-26TT	14PR	1450	467	DW16	250	2800
18.4-30TT	10PR	1552	467	W16L	180	2500
18.4-30TT	12PR	1552	467	W16L	220	2900
18.4-34TT	10PR	1654	467	W16L	180	2725
18.4-34TT	12PR	1654	467	W16L	220	3000
18.4-38TT	10PR	1755	467	W16L	180	2900
18.4-38TT	12PR	1755	467	W16L	220	3250
20.8-38TT	10PR	1834	528	W18L	150	3150
20.8-38TT	12PR	1834	528	W18L	190	3550
23.1-26TT	12PR	1605	587	DW20	170	3250
23.1-26TT	16PR	1605	587	DW20	220	3750
23.1-30TT	12PR	1707	587	DW20	170	3450
23.1-30TT	16PR	1707	587	DW20	225	4000



DR621

TAMANHO	PLY	DIAMETRO EXTERNO	LARGURA DE SEÇÃO	ARO STANDARD	PRESSÃO MAX (KPA)	CARGA MAX. KG
4.00-12 TT/TL	4PR	535	110	3.00D	340	250
4.00-19 TT/TL	4PR	720	110	3.00D	360	325
5.00-15 TT/TL	4PR	665	140	4J	300	325
5.00-16 TT/TL	6PR	665	150	4.00E	390	475
5.50-16 TT/TL	8PR	710	150	4.00E	370	530
6.00-16 TT/TL	8PR	740	160	4.00E	450	675
6.50-16 TT/TL	8PR	750	175	4.50E	420	735
7.5L-15 TT/TL	8PR	745	208	6LB	330	750
7.50-16 TT/TL	8PR	810	205	5.50F	390	775
7.50-18 TT/TL	8PR	860	205	5.50F	390	850
7.50-20 TT/TL	8PR	910	205	5.50F	370	1,020
9.5L-15 TT/TL	8PR	780	240	8LB	330	850
11L-15 TT/TL	8PR	810	280	8LB	300	950
9.00-16 3RIB TT/TL	8PR	890	245	W7L	400	1,200
9.00-16 3RIB TT/TL	10PR	890	245	W7L	360	1,500
10.00-16 3RIB/4RIB TT/TL	10PR	910	275	W8L	360	1,120
11.00-16 3RIB/4RIB TT/TL	10PR	970	315	W10L	330	1,320



DR651

TAMANHO	PLY	DIAMETRO EXTERNO	LARGURA DE SEÇÃO	ARO STANDARD	PRESSÃO MAX (KPA)	CARGA MAX. KG
14.9-24 TT	8PR	1305	378	W13	180	1600
14.9-28 TT	8PR	1406	378	W13	180	1700
18.4-30 TT	10PR	1550	467	W16L	180	2500
18.4-34 TT	10PR	1655	467	W16L	180	2725
18.4-38 TT	10PR	1755	467	W16L	180	2900
23.1-26 TT	12PR	1605	587	DW20	170	3250
23.1-26 TT	16PR	1605	587	DW20	220	3750
23.1-30 TT	12PR	1829	610	DW20	170	3450
23.1-30 TT	16PR	1829	610	DW20	225	4000



DR666

TAMANHO	PLY	DIAMETRO EXTERNO	LARGURA DE SEÇÃO	ARO STANDARD	PRESSÃO MAX (KPA)	CARGA MAX. KG
12.4-24 TT	8PR	1,159	315	W11	220	1,285
12.4-24 TT	12PR	1,159	315	W11	330	1,600
14.9-24 TT	8PR	1,265	378	W13	180	1,600
14.9-24 TT	12PR	1,265	378	W13	260	2,000
14.9-24 TL	8PR	1,265	378	W13	180	1,600
15.5-38 TT	10PR	1569	394	W14L	220	2000
15.5-38 TT	12PR	1569	394	W14L	260	2120
18.4-26 TT	12PR	1450	467	DW16	220	2650
18.4-26 TT	14PR	1450	467	DW16	250	2800
18.4-30 TT	10PR	1552	467	W16L	180	2500
18.4-30 TT	12PR	1552	467	W16L	220	2900
18.4-34 TT	10PR	1654	467	W16L	180	2725
18.4-34 TT	12PR	1654	467	W16L	220	3000
18.4-38 TT	10PR	1755	467	W16L	180	2900
18.4-38 TT	12PR	1755	467	W16L	220	3250



www.durable-tires.com